

## Determination of Hysteresis loss:

Let us consider a ring of specimen circumference  $l$  meters, cross-sectional area a  $\text{metre}^2$  and having  $N$  turns of an insulated wire. Let the current flowing through the coil be of  $I$  amperes.

$$\text{Magnetizing force, } H = \frac{NI}{l}$$

$$\text{or, } I = \frac{Hl}{N}$$

Let the flux density at this instant be  $B$ . Total flux through the ring,

$$\phi = B \cdot a \text{ webers.}$$

When the current flowing through the solenoid alters, the flux produced in the iron ring also alters, so the emf ( $e'$ ) is induced, whose value is given by

$$e' = -N \frac{d\phi}{dt} = -N \frac{d(B \cdot a)}{dt}$$

$$= -Na \frac{dB}{dt}$$

According to Lenz's law this induced emf will oppose the flow of current, therefore, in order to maintain the current  $I$  in the

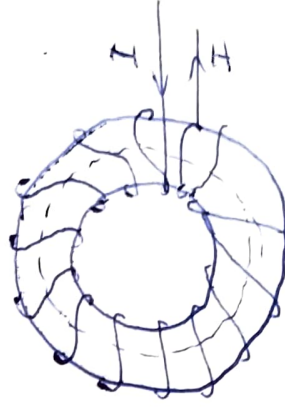


Fig-①

coil, the source of supply must have an equal and opposite emf.

Hence applied emf,  $e = -e'$

$$= N a \frac{dB}{dt}$$

Energy